

Tiny AR | 8W

Product Reference

Environment Indoor

Installation Ceiling Recess

Construction & Materials

Housing Aluminium

Primary Lens Polycarbonate

Primary Reflector PC metallised

Secondary Reflector Anodised

Body Finish White,Black,Custom

Diffuser -

Antiglare Baffle -

Thermal Management

Heat Sink Material Die cast Aluminium

Cooling Technique Passive Cooling

Optical System

Beam Direction Fixed

Tilt Yes

Swivel No

Electrical System

Driven with Constant Current Driver

Input Voltage/Hz 220V- 240V/50-60Hz

Control Gear Included



Mounting Remote

LED Power Watts 7.2W



System Power Watts 8.3W

Operating Voltage Vin 220-240 Vac

Power Factor p.f. > 0.95

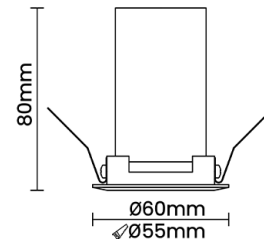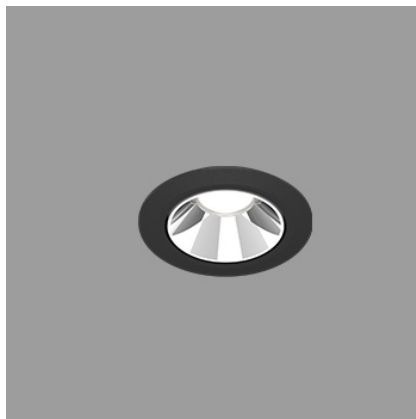

Light Distribution



LED Technology

Binning 3 Step MacAdam

LED Life Time @ L80/B10 >50000 hours

Colour Rendering (CRI) CRI80,CRI90

Led Type COB

LED Fitted CREE COB LED 9Vdc/700mA

Controls

Standard Switchable On/Off

Optional PDIM,DDIM,BTTM,CASAMBI,Non Dimmable

Ordering Details

Code Example:	Name	Watt	CCT	CRI	Angle	Finish	Control
	Tiny AR	8W	WW27K	CRI80	36°(MD)	SWH	On/Off

Select one from each column with highlighted values to create the ordering code

NAME	WATT	LUMEN	EFFICACY	CCT	CRI	ANGLE	FINISH	CONTROL	
Tiny AR	8W	581	70	2700K	WW27K	CRI80	36°(MD)	White SWH	Non Dimmable On/Off
		598	72	3000K	WW30K	CRI90	58°(WD)	Black SBL	Phase Dimmable PDIM
		631	76	4000K	NW40K			Custom CSM	Dali Dimmable DDIM
		647	78	5700K	CW57K				Bluetooth Dimmable BTTM
						2700K-5700K	TW		
				Warm to Dim	W2D				
Tiny AR	8W			WW27K	CRI80	36°(MD)	SWH	On/Off	

Abby reserves the right to discontinue any product from its collection at any time whatsoever and without prior notice

www.abbylighting.com