

## Rad | 10W

### Product Reference

Environment Indoor

Installation Ceiling Recess

### Construction & Materials

Housing Die Cast Aluminium

Primary Lens -

Primary Reflector White Optics

Secondary Reflector -

Body Finish White

Diffuser Premium high-transmission opal

Antiglare Baffle -

### Thermal Management

Heat Sink Material Die cast Aluminium

Cooling Technique Passive Cooling

### Optical System

Beam Direction General Diffuse

Tilt No

Swivel No

### Electrical System

Driven with Constant Current Driver

Input Voltage/Hz 220V- 240V/50-60Hz

Control Gear Included


Mounting Remote

LED Power Watts 8.9W


System Power Watts 10.2W

Operating Voltage Vin 220-240 Vac

Power Factor p.f. > 0.95

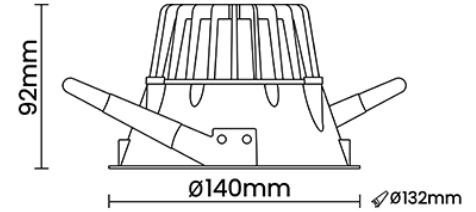

### Light Distribution



### LED Technology

Binning 3 Step MacAdam

LED Life Time @ L80/B10 >50000 hours

Colour Rendering (CRI) CRI80,CRI90

Led Type SMD mid power

LED Fitted Samsung Mid power LED array 32V-36Vdc/250mA

### Controls

Standard Switchable On/Off

Optional PDIM,DDIM,BTTM,CASAMBI,Non Dimmable

### Ordering Details

Code Example:	Name	Watt	CCT	CRI	Angle	Finish	Control
	<b>Rad</b>	<b>10W</b>	<b>WW27K</b>	<b>CRI80</b>	<b>78°</b>	<b>SWH</b>	<b>On/Off</b>

Select one from each column with highlighted values to create the ordering code

NAME	WATT	LUMEN	EFFICACY	CCT	CRI	ANGLE	FINISH	CONTROL			
<b>Rad</b>	<b>10W</b>	979	96	2700K	<b>WW27K</b>	<b>CRI80</b>	78°	White	<b>SWH</b>	Non Dimmable	<b>On/Off</b>
		1010	99	3000K	<b>WW30K</b>	CRI90				Phase Dimmable	<b>PDIM</b>
		1071	105	4000K	<b>NW40K</b>					Dali Dimmable	<b>DDIM</b>
		1091	107	5700K	<b>CW57K</b>					Bluetooth Dimmable	<b>BTTM</b>
										Casambi	<b>CBTM</b>
<b>Rad</b>	<b>10W</b>			<b>WW27K</b>	<b>CRI80</b>	<b>78°</b>	<b>SWH</b>	<b>on/off</b>			